



Ametalin

Performance insulation for a greener world

Wet Tropics Insulation Range

Ametalin SilverSark[®], SilverSark[®] HVB, SilverSark[®] xR and SilverWrap[™].



Residential & Commercial

Reflective vapour and weather barrier insulation and wall wraps.

For use in ABCB climate zones 1 - 2[#]


Ametalin
Performance insulation for a greener world

SilverSark[®] HVB
High Vapour Barrier
Extra Heavy Duty



81 m²
COVERAGE

WIDTH: 1350 mm
LENGTH: 60 m
AREA: 81 m²

Reflective wall insulation
For Climate Zone 1 wall systems in residential and commercial buildings.

- > Class 1 Vapour Barrier
- > Air and Water Barrier
- > Superior strength, puncture resistant
- > Low Flammability, suitable for all BALs in bushfire-prone areas
- > Can also be used for tile and metal roofs


Ametalin
Performance insulation for a greener world

SilverSark[®] XHD
Extra Heavy Duty



81 m²
COVERAGE

WIDTH: 1350 mm
LENGTH: 60 m
AREA: 81 m²

Reflective roof and wall insulation
For tile or metal roofs and walls in residential and commercial buildings

- > The all-round weather barrier for your home
- > Superior strength, puncture resistant
- > Water and Air Barrier, Class 2 Vapour Barrier
- > Low Flammability, suitable for all BALs in bushfire-prone areas


Ametalin
Performance insulation for a greener world

SilverWrap[™] MD
Medium Duty



81 m²
COVERAGE

WIDTH: 1350 mm
LENGTH: 60 m
AREA: 81 m²

Reflective wall and roof insulation
For wall systems in residential and commercial buildings

- > The traditional light weight weather barrier for your home
- > Achieves Group 1 Fire Performance Classification for wall/ceiling/lining
- > Water and Air Barrier, Class 2 Vapour Barrier
- > Low Flammability, suitable for all BALs in bushfire-prone areas
- > Can also be used for residential and commercial roofs


Ametalin
Performance insulation for a greener world

SilverSark[®] xR XHD
Extra R-value
Extra Heavy Duty



81 m²
COVERAGE

WIDTH: 1350 mm
LENGTH: 60 m
AREA: 81 m²

Reflective roof and wall insulation
For tile or metal roofs and walls in residential and commercial buildings

- > The best all-round weather barrier for your home
- > Superior strength, puncture resistant
- > Water and Air Barrier, Class 2 Vapour Barrier
- > Innovative low-glare, high IR reflection ink technology
- > Low Flammability, suitable for all BALs in bushfire-prone areas

For full product range and approved accessories please visit,

www.ametalin.com



Ametalin

Performance insulation for a greener world

SilverSark[®] HVB

Reflective High Vapour Barrier.



Extra Heavy Duty

Reflective wall insulation

For Climate Zone 1 wall systems in residential and commercial buildings.

Class 1 Vapour Barrier

Air and Water Barrier

Superior strength, puncture resistant

Low Flammability

Can also be used for tile
and metal roofs



Available roll size: **1350 mm x 60 m (81 m²)**



Ametalin

Performance insulation for a greener world

SilverSark[®] HD

The traditional reflective weather barrier.



Heavy Duty

Reflective roof and wall insulation

For tile or metal roofs and walls in residential and commercial buildings.

The all-round weather barrier
for your home

Superior strength, puncture resistant

Water and Air Barrier

Class 2 Vapour Barrier

Low Flammability



Available roll size: **1500 mm x 30 m (45 m²)** | **1200 mm x 60 m (72 m²)**
1350 mm x 60 m (81 m²)



Ametalin

Performance insulation for a greener world

SilverWrap™ MD

The traditional light weight reflective weather barrier.



Medium Duty

Reflective wall and roof insulation

For walls systems in Climate Zones 1, 2 and 3.

Achieves Group 1 Fire Performance Classification for wall/ceiling lining

Water and Air Barrier, Class 2 Vapour Barrier

Low Flammability, suitable for all BALs in bushfire-prone areas

Can also be used for residential and commercial roofs



Available roll size: **1350 mm x 30 m (40.5 m²) | 1500 mm x 30 m (45 m²)**
1350 mm x 60 m (81 m²)



Ametalin

Performance insulation for a greener world

SilverSark[®] xR HD Extra R-value

High performance reflective weather barrier.



Heavy Duty

Reflective roof and wall insulation

For walls and tile or metal roofs in residential and commercial buildings.

The best all-round weather barrier for your home

Superior strength, puncture resistant

Water and Air Barrier,
Class 2 Vapour Barrier

Innovative low-glare,
high IR reflection ink technology

Low Flammability



Available roll size: **1500 mm x 30 m (45 m²)** | **1350 mm x 60 m (81 m²)**



Ametalin

Performance insulation for a greener world

FireSark®

The all-in-one fire-resistant reflective insulation and wall wrap for the most extreme Bushfire Attack Levels and Non-combustible constructions.



Extra Heavy Duty

Fire resistant reflective insulation

For use in all roof and wall types in Non-Combustible constructions and ideal for use in all BAL zones.

Ember-proof

Ideal for all BAL zones to FZ bushfire-prone areas

Water and Air Barrier

Class 2 Vapour Barrier

97% reflective



Available roll size: **1350 mm x 30 m (40.5 m²)**



Ametalin

Performance insulation for a greener world

Thermal Insulation Range

Ametalin ThermalBreak™, ThermalLiner™ and ThermalFloor™ for year-round thermal comfort and energy efficiency in your home and shed.

Residential & Commercial

Available roll size: **ThermalBreak™** 7mm x 1350mm x 22.25m (30m²)

ThermalLiner™ 4mm x 1500mm x 20m (30m²)

ThermalFloor™ 4 mm x 500 mm x 60 m (30 m²)



Roof and wall home insulation

For R0.2 thermal break in-situ performance for steel framed residential construction.



Roof and wall shed insulation

For residential or commercial sheds



Underfloor insulation

For under floors that are adhered directly to floor joists

• Scored for quick and easy installation

• Double-sided foil radiant barrier

• Low Flammability

For full product range and approved accessories please visit,

www.ametalin.com



Ametalin

Performance insulation for a greener world

ThermalLiner™

High performance thermal break insulation for residential or commercial sheds.

Extra Heavy Duty

Roof and wall shed insulation

For residential homes or commercial sheds.

Flexible R0.11 reflective foam insulation liner

Low glare

Acoustic dampener

Low Flammability, suitable for all BAL's in bushfire-prone areas



Available roll size: **1500 mm x 20 m (30 m²)**



Ametalin

Performance insulation for a greener world

SilverSark[®] XHD

The traditional reflective weather barrier.



Extra Heavy Duty

Reflective roof and wall insulation

For tile or metal roofs and walls in residential and commercial buildings.

The all-round weather barrier
for your home

Superior strength, puncture resistant

Water and Air Barrier

Class 2 Vapour Barrier

Low Flammability



Available roll size: **1500 mm x 30 m (45 m²)** | **1200 mm x 60 m (72 m²)**
1350 mm x 60 m (81 m²)



Ametalin

Performance insulation for a greener world

SilverWrap™ MD

The traditional light weight reflective weather barrier.



Medium Duty

Reflective wall and roof insulation

For walls systems in Climate Zones 1, 2 and 3.

Achieves Group 1 Fire Performance Classification for wall/ceiling lining

Water and Air Barrier, Class 2 Vapour Barrier

Low Flammability, suitable for all BALs in bushfire-prone areas

Can also be used for residential and commercial roofs



Available roll size: **1350 mm x 30 m (40.5 m²) | 1500 mm x 30 m (45 m²)**
1350 mm x 60 m (81 m²)



Ametalin

Performance insulation for a greener world

SilverWrap™ LD

The traditional light weight reflective weather barrier.



Light Duty

Reflective wall insulation

For walls systems in Climate Zones 1, 2 and 3.

Tear resistant light weight weather barrier

Achieves Group 1 Fire Performance Classification for wall/ceiling lining

Water and Air Barrier, Class 2 Vapour Barrier

Low Flammability



Available roll size: **1350 mm x 10 m (13.5 m²) | 1500 mm x 30 m (45 m²)**
1350 mm x 60 m (81 m²)



Ametalin

Performance insulation for a greener world

SilverSark® HVB High Vapour Barrier

Extra Heavy Duty



www.ametalin.com

81 m²
COVERAGE

WIDTH: 1350 mm
LENGTH: 60 m
AREA: 81 m²

Reflective roof and wall insulation

For use in residential and commercial buildings requiring High Vapour Barriers

- > Class 1 Vapour Barrier, Air and Water Barrier
- > Superior strength and puncture resistant
- > Ideal for all BALs in bushfire-prone areas



*Scan QR Code to find your ABCB Climate Zone

APPLICATIONS (WHERE THIS PRODUCT CAN BE USED)										
ROOF: Flat Skillion/ Cathedral		Climate Zones	1	2	3	4	5			
ROOF: Pitched Roof with Horizontal Ceiling		Climate Zones	1	2	3	4	5	6	7	8
WALL: Lightweight Cladding System		Climate Zones	1	2 [#]	3 [#]					
WALL: Brick Veneer/ Double Brick		Climate Zones	1	2	3					
SHED ROOF / WALL		Climate Zones	1	2	3	4	5	6	7	8

#Lightweight Clad Walls: Please check cladding manufacturer's requirements and warranty before installation under cladding.

THIS PRODUCT MEETS THE REQUIREMENTS OF AS/NZS 4200.1			
PRODUCT IDENTIFIER	SILVERSARK-XHD-HVB		
DUTY	EXTRA HEAVY		
VAPOUR CLASSIFICATION	CLASS 1	VAPOUR BARRIER	
VAPOUR PERMEABILITY	0.0020 µg/N-s		
WATER CONTROL CLASSIFICATION	WATER BARRIER		
AIR CONTROL CLASSIFICATION	AIR BARRIER		
FLAMMABILITY INDEX	LOW (≤5)		
ELECTRICAL CONDUCTIVITY	CONDUCTIVE		

EMITTANCE	VALUE	CLASSIFICATION	CATEGORY
	0.90	IR NON-REFLECTIVE	RN
	0.03	IR REFLECTIVE	

Classifications in accordance with AS/NZS 4200.1
This product should be installed in accordance with AS 4200.2

Store this product under cover in a clean, dry place in the pack provided out of contact with alkaline products, cement and mortar.

CAUTION: ELECTRICALLY CONDUCTIVE MEMBRANES CAN CREATE A HAZARD WHEN CONTACTING LIVE CONDUCTORS

Recommended Accessories:



Ametalin Cap Nails



Ametalin ThermalCav™
Drainage Battens




Ametalin Double-sided
Insulation Fixing Tape



Ametalin Reinforced
Insulation/Ducting Tape

PRODUCT CODE:
XHD-HVB-81
ITEM NUMBER:
:0206104



Performance insulation for a greener world



Ametalin

Performance insulation for a greener world

SilverSark® HD

Heavy Duty



81m²
COVERAGE

WIDTH: 1350 mm
LENGTH: 60 m
AREA: 81 m²

Reflective roof and wall insulation

For tile or metal roofs and walls in residential and commercial buildings

- > Class 2 Vapour Barrier, Air and Water Barrier
- > Superior strength and puncture resistant
- > Ideal for all BALs in bushfire-prone areas



*Scan QR Code to find your ABCB Climate Zone

APPLICATIONS (WHERE THIS PRODUCT CAN BE USED)									
ROOF: Flat Skillion/ Cathedral		Climate Zones	1	2	3	4	5		
ROOF: Pitched Roof with Horizontal Ceiling		Climate Zones	1	2	3	4	5	6	7 8
WALL: Lightweight Cladding System		Climate Zones	1	2 [#]	3 [#]				
WALL: Brick Veneer/ Double Brick		Climate Zones	1	2	3				
SHED ROOF / WALL		Climate Zones	1	2	3	4	5	6	7 8

#Lightweight Clad Walls: Please check cladding manufacturer's requirements and warranty before installation under cladding.

THIS PRODUCT MEETS THE REQUIREMENTS OF AS/NZS 4200.1			
PRODUCT IDENTIFIER	SILVERSARK-HD		
DUTY	HEAVY		
VAPOUR CLASSIFICATION	CLASS 2	VAPOUR BARRIER	
VAPOUR PERMEABILITY	0.004 µg/N·s		
WATER CONTROL CLASSIFICATION	WATER BARRIER		
AIR CONTROL CLASSIFICATION	AIR BARRIER		
FLAMMABILITY INDEX	LOW (≤5)		
ELECTRICAL CONDUCTIVITY	CONDUCTIVE		
EMITTANCE	VALUE	CLASSIFICATION	CATEGORY
	0.90	IR NON-REFLECTIVE	RN
	0.03	IR REFLECTIVE	

Classifications in accordance with AS/NZS 4200.1
This product should be installed in accordance with AS 4200.2

Store this product under cover in a clean, dry place in the pack provided out of contact with alkaline products, cement and mortar.

CAUTION: ELECTRICALLY CONDUCTIVE MEMBRANES CAN CREATE A HAZARD WHEN CONTACTING LIVE CONDUCTORS

Recommended Accessories:



Ametalin Cap Nails



Ametalin ThermalCav™ Drainage Battens




Ametalin Double-sided Insulation Fixing Tape



Ametalin Reinforced Insulation/Ducting Tape

PRODUCT CODE:
HD-81
ITEM NUMBER:
:0182007



Performance insulation for a greener world



Ametalin

Performance insulation for a greener world

SilverWrap® MD

Medium Duty



www.ametalin.com

81m²
COVERAGE

WIDTH: 1350 mm
LENGTH: 60 m
AREA: 81 m²

Reflective wall and roof insulation

For tile or metal roofs and walls in residential and commercial buildings

- > Achieves Group 1 Fire Performance Classification for wall/ceiling lining
- > Class 2 Vapour Barrier, Air and Water Barrier
- > Ideal for all BALs in bushfire-prone areas



*Scan QR Code to find your ABCB Climate Zone

APPLICATIONS (WHERE THIS PRODUCT CAN BE USED)										
ROOF: Flat Skillion/ Cathedral		Climate Zones	1	2	3	4	5			
ROOF: Pitched Roof with Horizontal Ceiling		Climate Zones	1	2	3	4	5	6	7	8
WALL: Lightweight Cladding System		Climate Zones	1	2 [#]	3 [#]					
WALL: Brick Veneer/ Double Brick		Climate Zones	1	2	3					
SHED ROOF / WALL		Climate Zones	1	2	3	4	5	6	7	8

#Lightweight Clad Walls: Please check cladding manufacturer's requirements and warranty before installation under cladding.

THIS PRODUCT MEETS THE REQUIREMENTS OF AS/NZS 4200.1			
PRODUCT IDENTIFIER	SILVERWRAP-MD		
DUTY	MEDIUM		
VAPOUR CLASSIFICATION	CLASS 2	VAPOUR BARRIER	
VAPOUR PERMEABILITY	0.0131 µg/N-s		
WATER CONTROL CLASSIFICATION	WATER BARRIER		
AIR CONTROL CLASSIFICATION	AIR BARRIER		
FLAMMABILITY INDEX	LOW (≤5)		
ELECTRICAL CONDUCTIVITY	CONDUCTIVE		
EMITTANCE	VALUE	CLASSIFICATION	CATEGORY
	0.90	IR NON-REFLECTIVE	RN
	0.03	IR REFLECTIVE	

Classifications in accordance with AS/NZS 4200.1
This product should be installed in accordance with AS 4200.2

Store this product under cover in a clean, dry place in the pack provided out of contact with alkaline products, cement and mortar.

CAUTION: ELECTRICALLY CONDUCTIVE MEMBRANES CAN CREATE A HAZARD WHEN CONTACTING LIVE CONDUCTORS

Recommended Accessories:



Ametalin Cap Nails



Ametalin ThermalCav™ Drainage Battens




Ametalin Double-sided Insulation Fixing Tape



Ametalin Reinforced Insulation/Ducting Tape

PRODUCT CODE:
MD-81
ITEM NUMBER:
:0810104



9 339338 000064

Performance insulation for a greener world



Ametalin

Performance insulation for a greener world

SilverSark® xR HD Extra R-value

Heavy Duty



45 m²
COVERAGE

WIDTH: 1500 mm
LENGTH: 30 m
AREA: 45 m²

Reflective roof and wall insulation

For tile or metal roofs and walls in residential and commercial buildings

- > Class 2 Vapour Barrier, Air and Water Barrier
- > Superior strength and puncture resistant
- > Innovative low-glare, high IR reflection ink technology
- > Ideal for all BALs in bushfire-prone areas



*Scan QR Code to find your ABCB Climate Zone

APPLICATIONS (WHERE THIS PRODUCT CAN BE USED)									
ROOF: Flat Skillion/ Cathedral		Climate Zones	1	2	3	4	5		
ROOF: Pitched Roof with Horizontal Ceiling		Climate Zones	1	2	3	4	5	6	7 8
WALL: Lightweight Cladding System		Climate Zones	1	2#	3#				
WALL: Brick Veneer/ Double Brick		Climate Zones	1	2	3				
SHED ROOF / WALL		Climate Zones	1	2	3	4	5	6	7 8

#Lightweight Clad Walls: Please check cladding manufacturer's requirements and warranty before installation under cladding.

THIS PRODUCT MEETS THE REQUIREMENTS OF AS/NZS 4200.1			
PRODUCT IDENTIFIER	SILVERSARK-HD-XR		
DUTY	HEAVY		
VAPOUR CLASSIFICATION	CLASS 2	VAPOUR BARRIER	
VAPOUR PERMEABILITY	0.02141 µg/N-s		
WATER CONTROL CLASSIFICATION	WATER BARRIER		
AIR CONTROL CLASSIFICATION	AIR BARRIER		
FLAMMABILITY INDEX	LOW (≤5)		
ELECTRICAL CONDUCTIVITY	CONDUCTIVE		
EMITTANCE	VALUE	CLASSIFICATION	CATEGORY
	0.05	IR REFLECTIVE	RR
	0.03	IR REFLECTIVE	
Classifications in accordance with AS/NZS 4200.1 This product should be installed in accordance with AS 4200.2			

Store this product under cover in a clean, dry place in the pack provided out of contact with alkaline products, cement and mortar.

CAUTION: ELECTRICALLY CONDUCTIVE MEMBRANES CAN CREATE A HAZARD WHEN CONTACTING LIVE CONDUCTORS

Recommended Accessories:



Ametalin Cap Nails



Ametalin ThermalCav™
Drainage Battens




Ametalin Double-sided
Insulation Fixing Tape



Ametalin Reinforced
Insulation/Ducting Tape

PRODUCT CODE:
HD-XR-45
ITEM NUMBER:
:0182014



9 339338 002549

Performance insulation for a greener world




Ametalin

Performance insulation for a greener world

FireSark®

Extra Heavy Duty

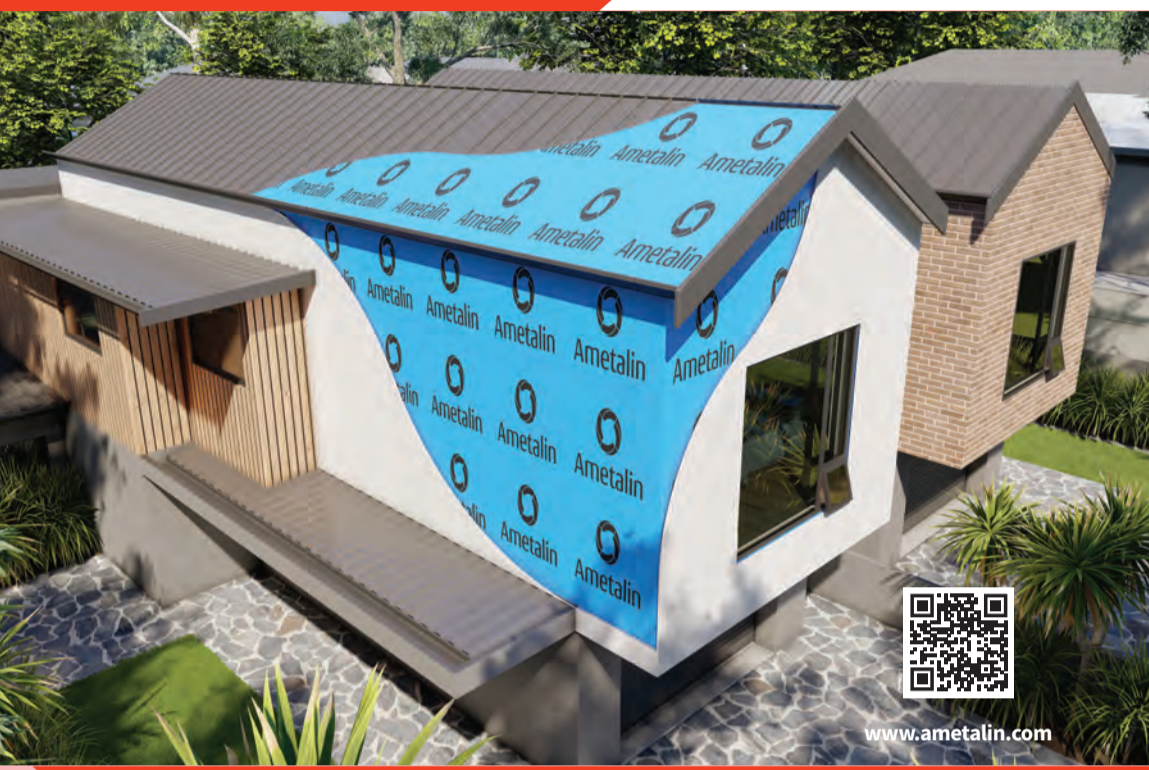

www.ametalin.com

40.5 m²
COVERAGE

WIDTH: 1350 mm
LENGTH: 30 m
AREA: 40.5 m²

Fire resistant reflective insulation

For use in all roof and wall types in Non-combustible constructions and superior choice for all bushfire-prone areas

- > Ember-proof and Smoke Barrier
- > Class 2 Vapour Barrier, Air and Water Barrier
- > High wind load performance to 8.0 kPa
- > Superior heat resistance



*Scan QR Code to find your ABCB Climate Zone

APPLICATIONS (WHERE THIS PRODUCT CAN BE USED)										
ROOF: Flat Skillion/ Cathedral		Climate Zones	1	2	3	4	5			
ROOF: Pitched Roof with Horizontal Ceiling		Climate Zones	1	2	3	4	5	6	7	8
WALL: Lightweight Cladding System		Climate Zones	1	2 [#]	3 [#]					
WALL: Brick Veneer/ Double Brick		Climate Zones	1	2	3					
SHED ROOF / WALL		Climate Zones	1	2	3	4	5	6	7	8

#Lightweight Clad Walls: Please check cladding manufacturer's requirements and warranty before installation under cladding.

THIS PRODUCT MEETS THE REQUIREMENTS OF AS/NZS 4200.1			
PRODUCT IDENTIFIER	FIRESARK-FS		
DUTY	EXTRA HEAVY		
VAPOUR CLASSIFICATION	CLASS 2	VAPOUR BARRIER	
VAPOUR PERMEABILITY	0.003 µg/N·s		
WATER CONTROL CLASSIFICATION	WATER BARRIER		
AIR CONTROL CLASSIFICATION	AIR BARRIER		
FLAMMABILITY INDEX	LOW (≤5)		
ELECTRICAL CONDUCTIVITY	CONDUCTIVE		
EMITTANCE	VALUE	CLASSIFICATION	CATEGORY
	0.90	IR NON-REFLECTIVE	RN
	0.03	IR REFLECTIVE	
Classifications in accordance with AS/NZS 4200.1 This product should be installed in accordance with AS 4200.2			

Store this product under cover in a clean, dry place in the pack provided out of contact with alkaline products, cement and mortar.

CAUTION: ELECTRICALLY CONDUCTIVE MEMBRANES CAN CREATE A HAZARD WHEN CONTACTING LIVE CONDUCTORS

Recommended Accessories:




Ametalin Double-sided Insulation Fixing Tape



Ametalin Non-combustible ThermalBreak® Strips


PRODUCT CODE:
FS-40
ITEM NUMBER:
:0106451



Ametalin Non-combustible Insulation Flashing Tape



Ametalin ThermalCav™ Drainage Battens

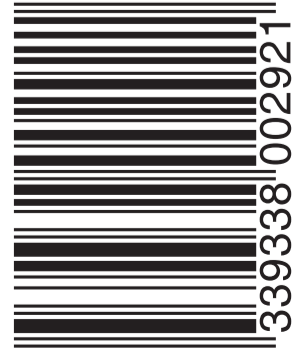

9 339338 002921

Performance insulation for a greener world

